

IVN-22MR

IP VANDAL DOME IR




KEY FEATURES

- High performance Sony CMOS, 2M, 1080P
- Audio, hardware reset, waterproof RJ45, deep base
- H.264 ,dual-stream
- Max resolution:1920*1080
- Onvif and P2P supported
- IR Cut Filter
- 3pcs IR Array up to 30 meter
- IP66
- 2.8-12mm Auto Focus lens



SPECIFICATION	IVN-22MR
Sensor	1/2.8" SONY CMOS
Min Illumination	Color 0.1Lux@F1.2,white/black 0.01 Lux@F1.2
WDR Range	dWDR Range >80db
Video processing	H.264, dual-stream, CBR/VBR, 32K~16M bit/S adjustable, 1-30fps adjustable
Main stream	1920*1080,1-25(30)fps / 1280*720,1-25(30)fps
Sub stream	720*576,1-25(30)fps / 640*480,1-25(30)fps 640*352,1-25(30)fps / 320*240,1-25(30)fps
Audio interface	Support 1 channel linear audio input,1channel audio output
Audio processing	G.711 coding Standard, Support both way Voice intercom function, support the synchronization of audio and video
network Port	1 RJ45 ethernet network port, 10M/100M self-adaption
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
IR linkage	support
Reset interface	support
Operation function	Support WEB setting, OSD,real-time video transmission; motion detection; unified client remote management software, platform system application; complete SDK provided
Standard protocol	Onvif 2.4
Mobile monitor	Support P2P, (IOS, Android)
Power supply	DC10.8V~13.2V, PoE 450mA
Working temperature	-20C~55C
Protection rate	ESD 1kv
IR Series Distance	Max. 30 Meter with 3pcs IR Array
Lens	2.8-12mm Auto focus Lens
Camera size	146(L)×134(W)×121(H)mm

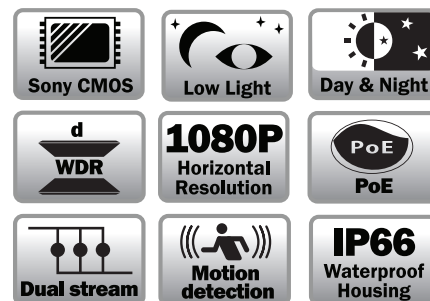

DIMENSIONS

