

Item code: 70324-HXVR-32P104H4

Product description: Turbo HD DVR PRO Series

Main features: TURBO HD DVR 32 Channels, support H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression. HDTVI input 8 MP, AHD input 5 MP, HDCVI input 4 MP, CVBS input PAL/NTSC, Audio IN/Out 4/1, Serial interface RS-232 , RS-485 (full-duplex), keyboard, USB interface - Front panel: 2 × USB 2.0, Rear panel: 1 × USB 3.0, Power supply 100 to 240 Vac.



SPECIFICATIONS

Recording	
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding resolution	8 MP/5 MP/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF
Frame rate	Main stream: 8 MP@8fps/5 MP@12fps; 4 MP@15fps; 3 MP@18fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
Video bit rate	32 Kbps to 10 Mbps
Dual stream	Support
Stream type	Video, Video & Audio
Audio compression	G.711u
Audio bit rate	64 Kbps
Video and Audio	
IP video input	16-ch (up to 48-ch) Up to 8 MP resolution Support H.265+/H.265/H.264+/H.264 IP cameras
Analog video input	32-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
HDTVI input	8 MP, 5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30
CVBS input	PAL/NTSC
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω) <i>Resolution</i> PAL: 704 × 576, NTSC: 704 × 480
HDMI/VGA output	1-ch, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
HDMI2 output	1-ch, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)
Audio output	1-ch, RCA (Linear, 1 KΩ)



BS OHSAS 18001:2007
Occupational Health and Safety Management System



ISO 9001:2015
Quality Management System



ISO 14001:2015
Environmental Management System



CI ITPI: 2015
100% Made in Italy Certificate




MAZi – Brand distributed by LINCE ITALIA S.p.A.
Via Variante di Cancelliera s.n.c., 00072 Ariccia (RM) Italia
Tel.: +39 06 92928252 - Fax: +39 06 92942586

www.lince.net - info@lince.net
MD-03.11 Rev. 6 - Pag.: 1 di 2

Two-way audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (independent)
Synchronous playback	16-ch
Network	
Remote connection	128
Network protocol	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP
Network interface	2, RJ45 10 M/100 M/1000 M self-adaptive Ethernet interface
Auxiliary Interface	
SATA	4 SATA interface
eSATA	Support
Capacity	Up to 10 TB capacity for each disk
Serial interface	RS-232, RS-485 (full-duplex), keyboard
Alarm in/out	16/04/20
USB interface	<i>Front panel:</i> 2 × USB 2.0 <i>Rear panel:</i> 1 × USB 3.0
General	
Power supply	100 ÷ 240 Vac
Consumption (without HDD)	≤ 74 W
Working temperature	-10 °C ÷ 55 °C (14 °F ÷ 131 °F)
Working humidity	10% ÷ 90%
Dimensions (W × D × H)	440 × 390 × 70 mm (17.3 × 15.4 × 2.8 inch)
Weight (without HDD)	≤ 7 kg (15.4 lb)

Physical Interfaces

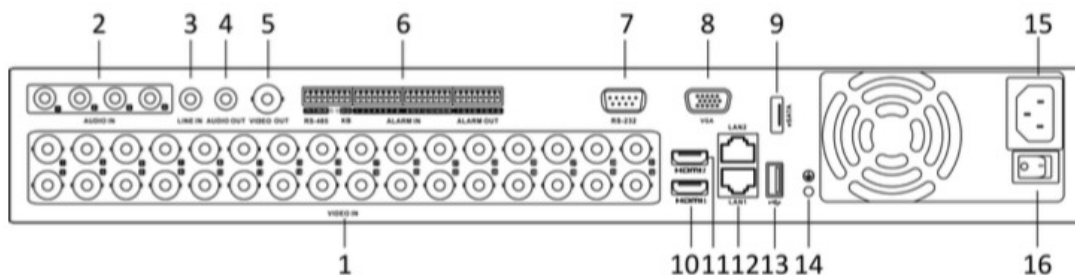

Index	Description	Index	Description
1	Video IN	9	eSATA interface
2	Video IN, RCA Connector	10	HDMI1 interface
3	Line IN	11	HDMI2 interface
4	Audio OUT	12	LAN1 and LAN2 Network Interfaces
5	Video OUT	13	USB interface
6	RS-485 Serial Interface, keyboard Interface, Alarm IN and Alarm OUT	14	GND
7	RS-232 Serial Interface	15	100 ÷ 240 Vac Power Input
8	VGA Interface	16	Power Switch