

AVN-71SMVR

ANALOG OUTDOOR DOME




KEY FEATURES

- 1/3" CMOS
- Low illumination
- High resolution: 800TVL
- ICR, 2D-DNR, AGC, AWB
- 36pcs IR LED, 30 meter
- 2.8-12mm lens
- IP66
- Deep base for hiding cables



SPECIFICATION	AVN-71SMVR
Pick Up Element	1/3" CMOS
Horizontal Resolution	800TVL
IR Function	Yes (Built-in IR CUT filter)
Video Output	1.0Vp-p Composite Signal (75ohm)
Minimum Illumination	0.01Lux (0 Lux with IR)
Electronic Shutter	1/50-100,000Sec
Gamma Characteristic	0.45
IR LED	36pcs IR LED
Scanning System	2:1 interlace
Sync System	Internal Synchronization
Auto Gain Control	Auto
Auto White Balance	Auto
Digital Noise Reduction	2D-DNR
Lens	2.8-12 mm
Power/Current	12VDC(±10%)/ 400mA
S/N Ratio	≥48dB (AGC off)
Water Resistance	IP66
Dimension (mm)	146.39(D)x 121.5 (H)
Storage Temperature	-30~ +60 °C RH95% Max
Operating Temperature	-20~ +50 °C RH95% Max

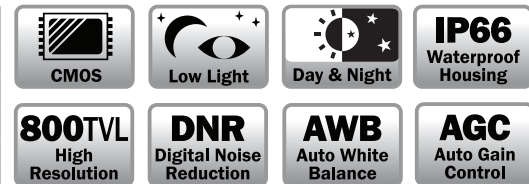

DIMENSIONS

