


HTVR-3280LT

HD TVI DVR



KEY FEATURES


- Connectable to TVI and analog cameras
- Connectable to network cameras
- Simultaneous HDMI and VGA outputs at up to 1920 1080p resolution
- Support up to 32-ch synchronous playback and reverse playback for multi-channel
- Support VCA alarm (line crossing detection and intrusion detection)
- Provide 4 SATA interfaces and 1 eSATA interface for record and backup
- 1 self-adaptive 10M/100M/1000M network interface
- Network detection function



SPECIFICATION	HTVR-3280LT
Video/audio input	
Video compression	H.264
Analog and HD-TVI video input	32-ch BNC interface (1.0Vp-p, 75 Ω)
Supported camera types	720p/25, 720p/30, 720p/50, 720p/60, 1080p/25, 1080p/30, CVBS
IP video input	8-ch (up to 32-ch) Up to 2MP resolution
Audio compression	G.711u
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)
Two-way audio in	1-ch, RCA (2.0 Vp-p, 1 KΩ)
Video/Audio output	
HDMI / VGA output	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Encoding resolution	Main stream: 1080p (non-real-time)/720p/WD1/VGA/4CIF/CIF Sub-stream: WD1 (non-real-time)/4CIF (non-real-time)/CIF/QCIF/QVGA
Frame rate	Main stream: 1/16 fps to Real time frame rate Sub-stream: 1/16 fps to Real time frame rate
Video bitrate	32 Kbps to 6 Mbps
Audio output	1-ch, RCA (Linear, 1KΩ)
Audio bitrate	64 Kbps
Dual-stream	Support
Stream type	Video, Video & Audio
Synchronous playback	32-ch
Playback resolution	1080p/720p/VGA/WD1/4CIF/CIF/QVGA/QCIF
Network management	
Remote connection	128
Network protocols	TCP/IP, PPPoE, DHCP, EZVIZ Cloud P2P, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
Hard disk	
Type	4 SATA interfaces for 4 HDDs; 1 eSATA interface
Capacity	Up to 6TB capacity for each disk
External interface	
Network interface	1; 10M/100M/1000M self-adaptive Ethernet interface
Serial interface	RS-232, RS-485, Keyboard
USB port	3 × USB 2.0
Alarm in / out	16/4
General	
Power supply	100 to 240 VAC, 47 to 63 HZ
Consumption (without HDD)	≤ 65W
Working temperature	-10°C to +55°C
Working humidity	10% to 90%
Chassis	19-inch rack-mounted 1.5U chassis
Dimensions (W × D × H)	445 × 390 × 70 mm
Weight (without HDD)	≤ 5 Kg



Rear panel

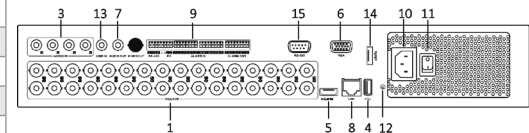

- 1 VIDEO IN
- 2 AUDIO IN, RCA Connector
- 3 USB Port
- 4 HDMI Interface
- 5 VGA Interface
- 6 VGA AUDIO OUT
- 7 LAN Network Interface
- 8 VIDEO IN
- 9 RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
- 10 100 to 240 VAC Power Input
- 11 Power Switch
- 12 GND
- 13 LINE IN
- 14 eSATA Interface
- 15 RS-232 Serial Port