

Item code: 70425-INVR-08P112H2

Product description: NVR PRO Series

Main features: IdSmart NVR 8 Channel: Support H.265/H.265+/H.264/H.264+/MPEG4; Incoming bandwidth: 80 Mbps, Outgoing bandwidth: 256 Mbps; USB interface - Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0. Power supply: 100 ÷ 240 Vac.



SPECIFICATIONS

Video/Audio Input	
IP video input	8-ch
Two-way audio	1-ch, RCA (2.0 Vp-p, 1 kΩ)
Network	
Incoming/Outgoing bandwidth	80 Mbps/256 Mbps
Video/Audio Output	
Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080 p/UXGA/720 p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω)
HDMI resolution	4K (3840 × 2160)/60 Hz, 4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
VGA resolution	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Audio output	1-ch, RCA (Linear, 1 kΩ)
Decoding	
Decoding format	H.265/H.265+/H.264/H.264+/MPEG4
Synchronous playback	8-ch
Capability	12 × 1080p
Smart Analysis	
Capability	False alarm filtering for 4-ch behavior (line crossing and intrusion) detection for network camera with resolution less than or equal to 4 MP.
Hard Disk	
SATA	2 SATA interfaces for two 3.5-inch HDDs
Capacity	Up to 8 TB capacity for each HDD
External Interface	
Network interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
USB interface	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0
Alarm in/out	4/1
General	
Power supply	12 Vdc, 3.33 A
Consumption (without HDD)	≤ 15 W



BS OHSAS 18001:2007
Occupational Health and Safety Management System



ISO 9001:2015
Quality Management System



ISO 14001:2015
Environmental Management System



CI IPTI: 2015
100% Made in Italy Certificate




MAZi – Brand distributed by **LINCE ITALIA S.p.A.**
Via Variante di Cancelliera s.n.c., 00072 Ariccia (RM) Italia
Tel.: +39 06 92928252 - Fax: +39 06 92942586

www.lince.net – info@lince.net
MD-03.11 Rev. 6 - Pag.: 1 di 2

Working temperature	-10 °C ÷ +55 °C (14 °F ÷ 131 °F)
Working humidity	10 ÷ 90 %
Chassis	1U chassis
Dimensions (W × D × H)	380 × 315 × 51.5 mm (15.0"× 12.4" × 2.0")
Weight (without HDD)	≤ 3 kg (6.6 lb)

Physical Interfaces

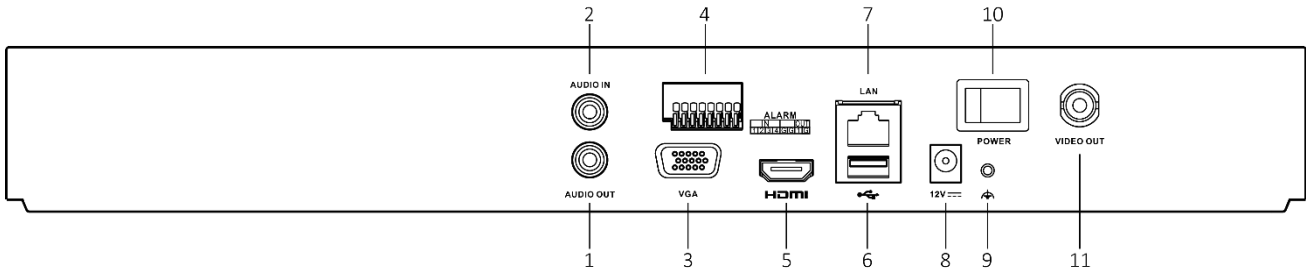

Index	Description	Index	Description
1	AUDIO OUT	7	LAN Network Interface
2	AUDIO IN	8	12 Vdc Power Input
3	VGA Interface	9	GND
4	ALARM IN/OUT	10	Power Switch
5	HDMI Interface	11	VIDEO OUT
6	USB 3.0 Interface		