

# TWC-52MRP

HD TVI POC IR BULLET




## KEY FEATURES

- 5 MP high-performance CMOS
- 2560 x 1944 resolution
- 2.8 mm to 12 mm motorized vari-focal lens
- EXIR 2.0, smart IR, up to 40m IR distance
- OSD menu, DNR, DWDR
- IP67
- PoC.at
- Up the coax



SPECIFICATION	TWC-52MRP
Camera	
Image Sensor	5.0 megapixel progressive scan CMOS
Resolution	2560 (H) × 1944 (V)
Min. illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 s to 1/50,000 s
Lens	2.8 mm to 12 mm motorized varo-focal lens
Horizontal Field of View	90.4°to 28°
Lens Mount	Φ14
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°, Tilt:0° to 90°, Rotate: 0° to 360°
Synchronization	Internal synchronization
Frame rate	2560 × 1944@20fps, 2560 × 1944@12.5fps 2560 × 1440@30fps, 2560 × 1440@25fps (default) 1920 × 1080@30fps, 1920 × 1080@25fps * Under the PoC mode, 2560×1944@12.5fps is not available
Menu	
AGC	Support
D/N Mode	Auto/Color/BW
White Balance	ATW/MWB
BLC	Support
dWDR	Support
Language	English
Functions	Brightness, Sharpness, DNR, Mirror,Smart IR
Interface	
Video Output	1 HD analog output
General	
Operating Conditions	-40 °C to 60 °C, humidity: 90% or less (non-condens.)
Power Supply	12V DC±25%/PoC.at
Power Consumption	Max. 8 W
Ingress Protection	IP67
Material	Metal & Plastic
IR Range	Up to 40 m
Communication	Up the coax
Dimensions	92 mm × 84.8 mm × 269.6 mm
Weight	Approx. 900g

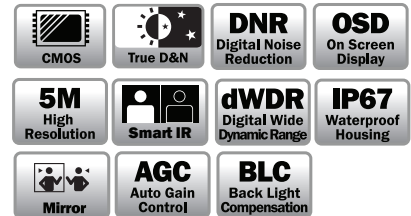

## DIMENSIONS:

