

TVK-23MRSS

STAINLESS STEEL HD TVI




KEY FEATURES

- 1/2.8" SONY 2Mega Exmor CMOS Sensor
- Privacy Masking (16 Zones)
- No Noise, Ghosting Effect with DNR
- Highest Resolution: Vivid Sharp Picture in complete darkness
- UTC Built-in
- 1080P Full-HD Analog TVI camera
- 2.8-12mm (4.3x) Motorized Varifocal lens
- True Day/Night with ICR
- Dual Power (AC 24V/DC 12V)



SPECIFICATION	TVK-23MRSS
Sensor type	1/2.8" SONY 2Mega Exmor CMOS Sensor
Effective pixels	1984(H) X 1105(V), 2.19M Pixels
Total pixels	2000(H) X 1121(V), 2.24M Pixels
Resolution	1920X1080(1080p@30f / 1080p@25f) 1280X720_CROP(720p@60f / 720p@50f) 1280X720(720p@30f / 720p@25f)
Scanning system	Progressive Scan
Min. illumination	0 Lux (IR LED ON)
Video Output	1.0Vp-p TVI(Transport Video Interface) 75 Ohms 1.0Vp-p Composite 75 Ohms
S/N Ratio	More than 50dB
Lens	2.8-12mm(4.3x) Motorized Vari-Focal Lens
AGC	0 - 20 Level Adjustable
Shutter Speed	AUTO / Manual(1/30,1/25Sec - 1/30000Sec) / FLICKER
Brightness	0 - 20 Level Adjustable
Sens-UP	OFF/x2 - x32
WDR(Wide Dynamic Range)	OFF / ON (Low,Middle,High)(15 Frame)
Backlight Compensation(BLC)	OFF/ON
HSBLC	OFF/ON
ACE(D-WDR/ATR-EX))	OFF/LOW/MIDDLE/HIGH
Motion Detection	OFF/ON (4 Zone)
Alarm Output	Option
Privacy Masking	OFF/ON (16 Zone)
Day & Night	Auto(AGC)/Day/Night/Ext
Smart -IR(IR OPTIMIZER)	0-20 Level Adjustable
White Balance	Auto(2,500K - 9,500K) / AWC ^ Set / Manual /AWB
Digital Noise Reduction	2D, 3DNR
Mirror	MIRROR,V-FLIP
D-ZOOM(EZOOM)	OFF/ON (x2 - x8)
Sharpness	0-20 Level Adjustable
DEFOG	OFF/ON
GAMMA Correction	r = 0.45 - 0.65
Lens Shading(LSC)	OFF/ON
Language	ENG
Defect(White pix mask)	AUTO (1024EA)
IR Spectrum	850Nm/30° x Ø5 x 24EA
Storage Temperature	-20°C- +60°C(Humidity : 20%RH - 95%RH)
Operating Temperature	-10T- +50°C(Humidity : 20%RH - 80%RH)
Dimension(W x H x D)	155mm(W) 94.4mm(H) * 155mm(D)
Weight	2000g

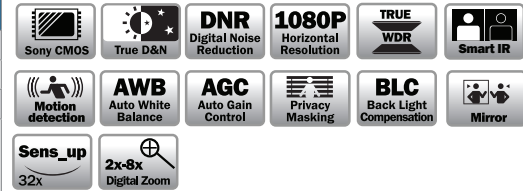

DIMENSIONS:

